


circuit diagram

P9

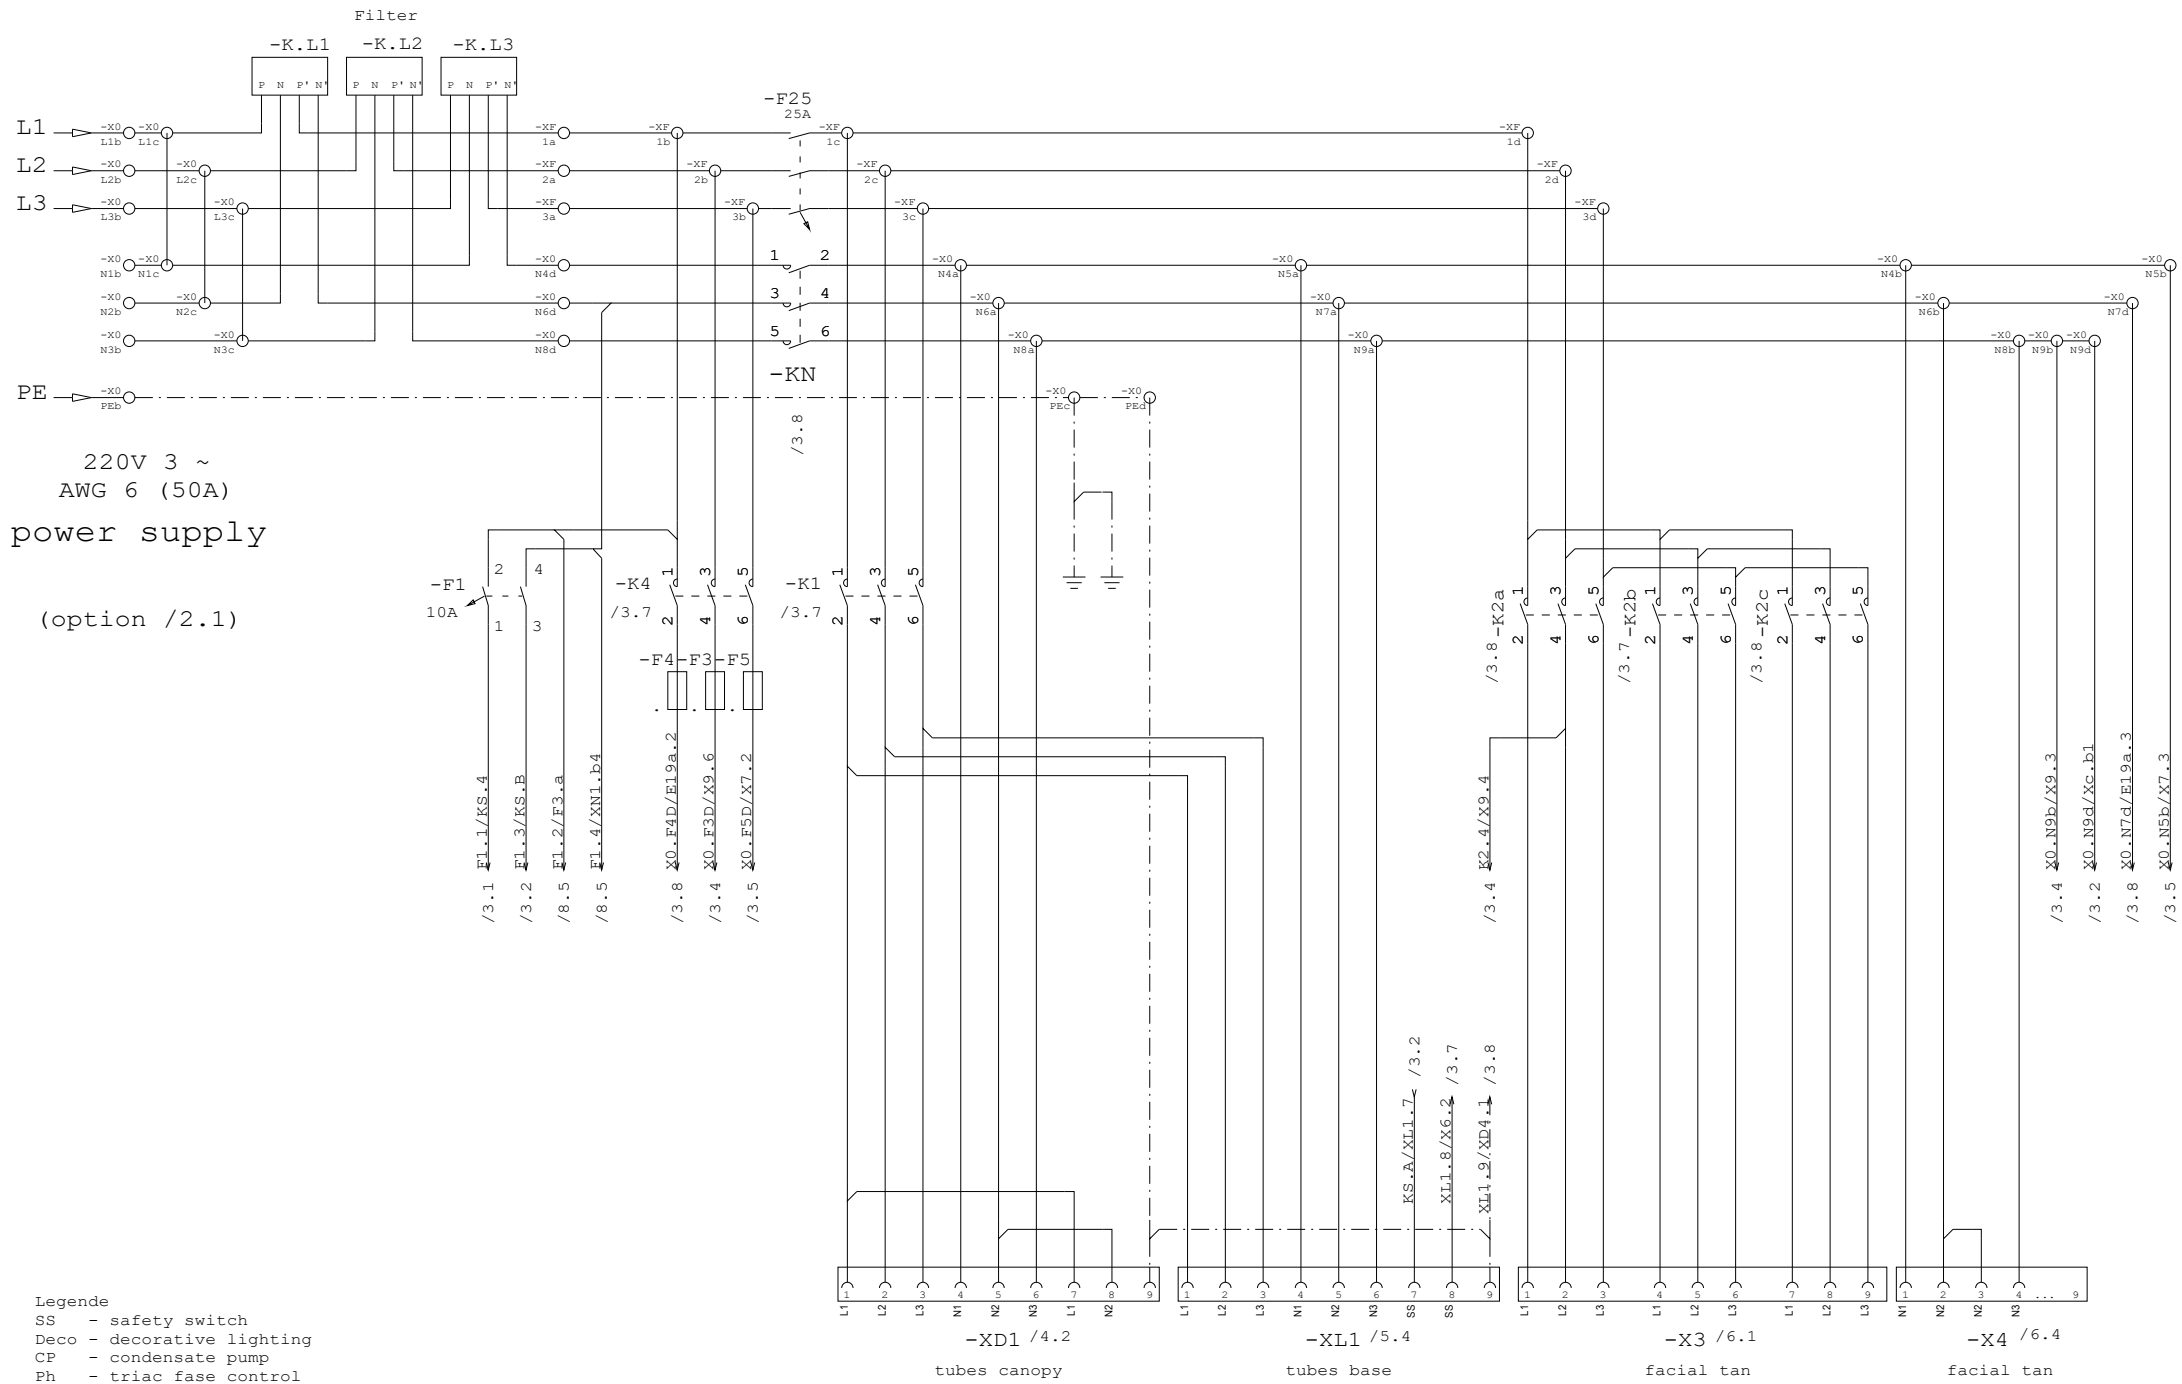

220V 3 ~
AWG 6 (50A)
power supply
(option /2.1)

- Legende
- SS - safety switch
 - Deco - decorative lighting
 - CP - condensate pump
 - Ph - triac fase control

date	19.09.19
name	R.Schmidt
vers.	MS P9 US 01-0919


MS P9 US




control-unit


subject to alternations
Blatt 1 von 13 Bl.


powersupply option



power supply cord and device terminals must be dimensioned to the current load

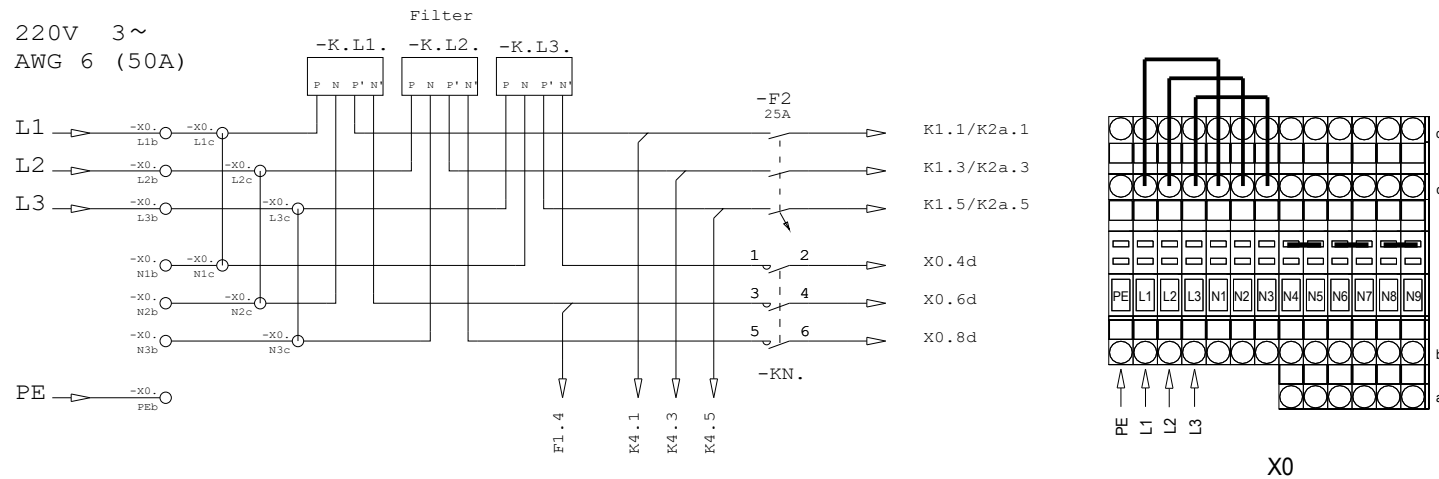

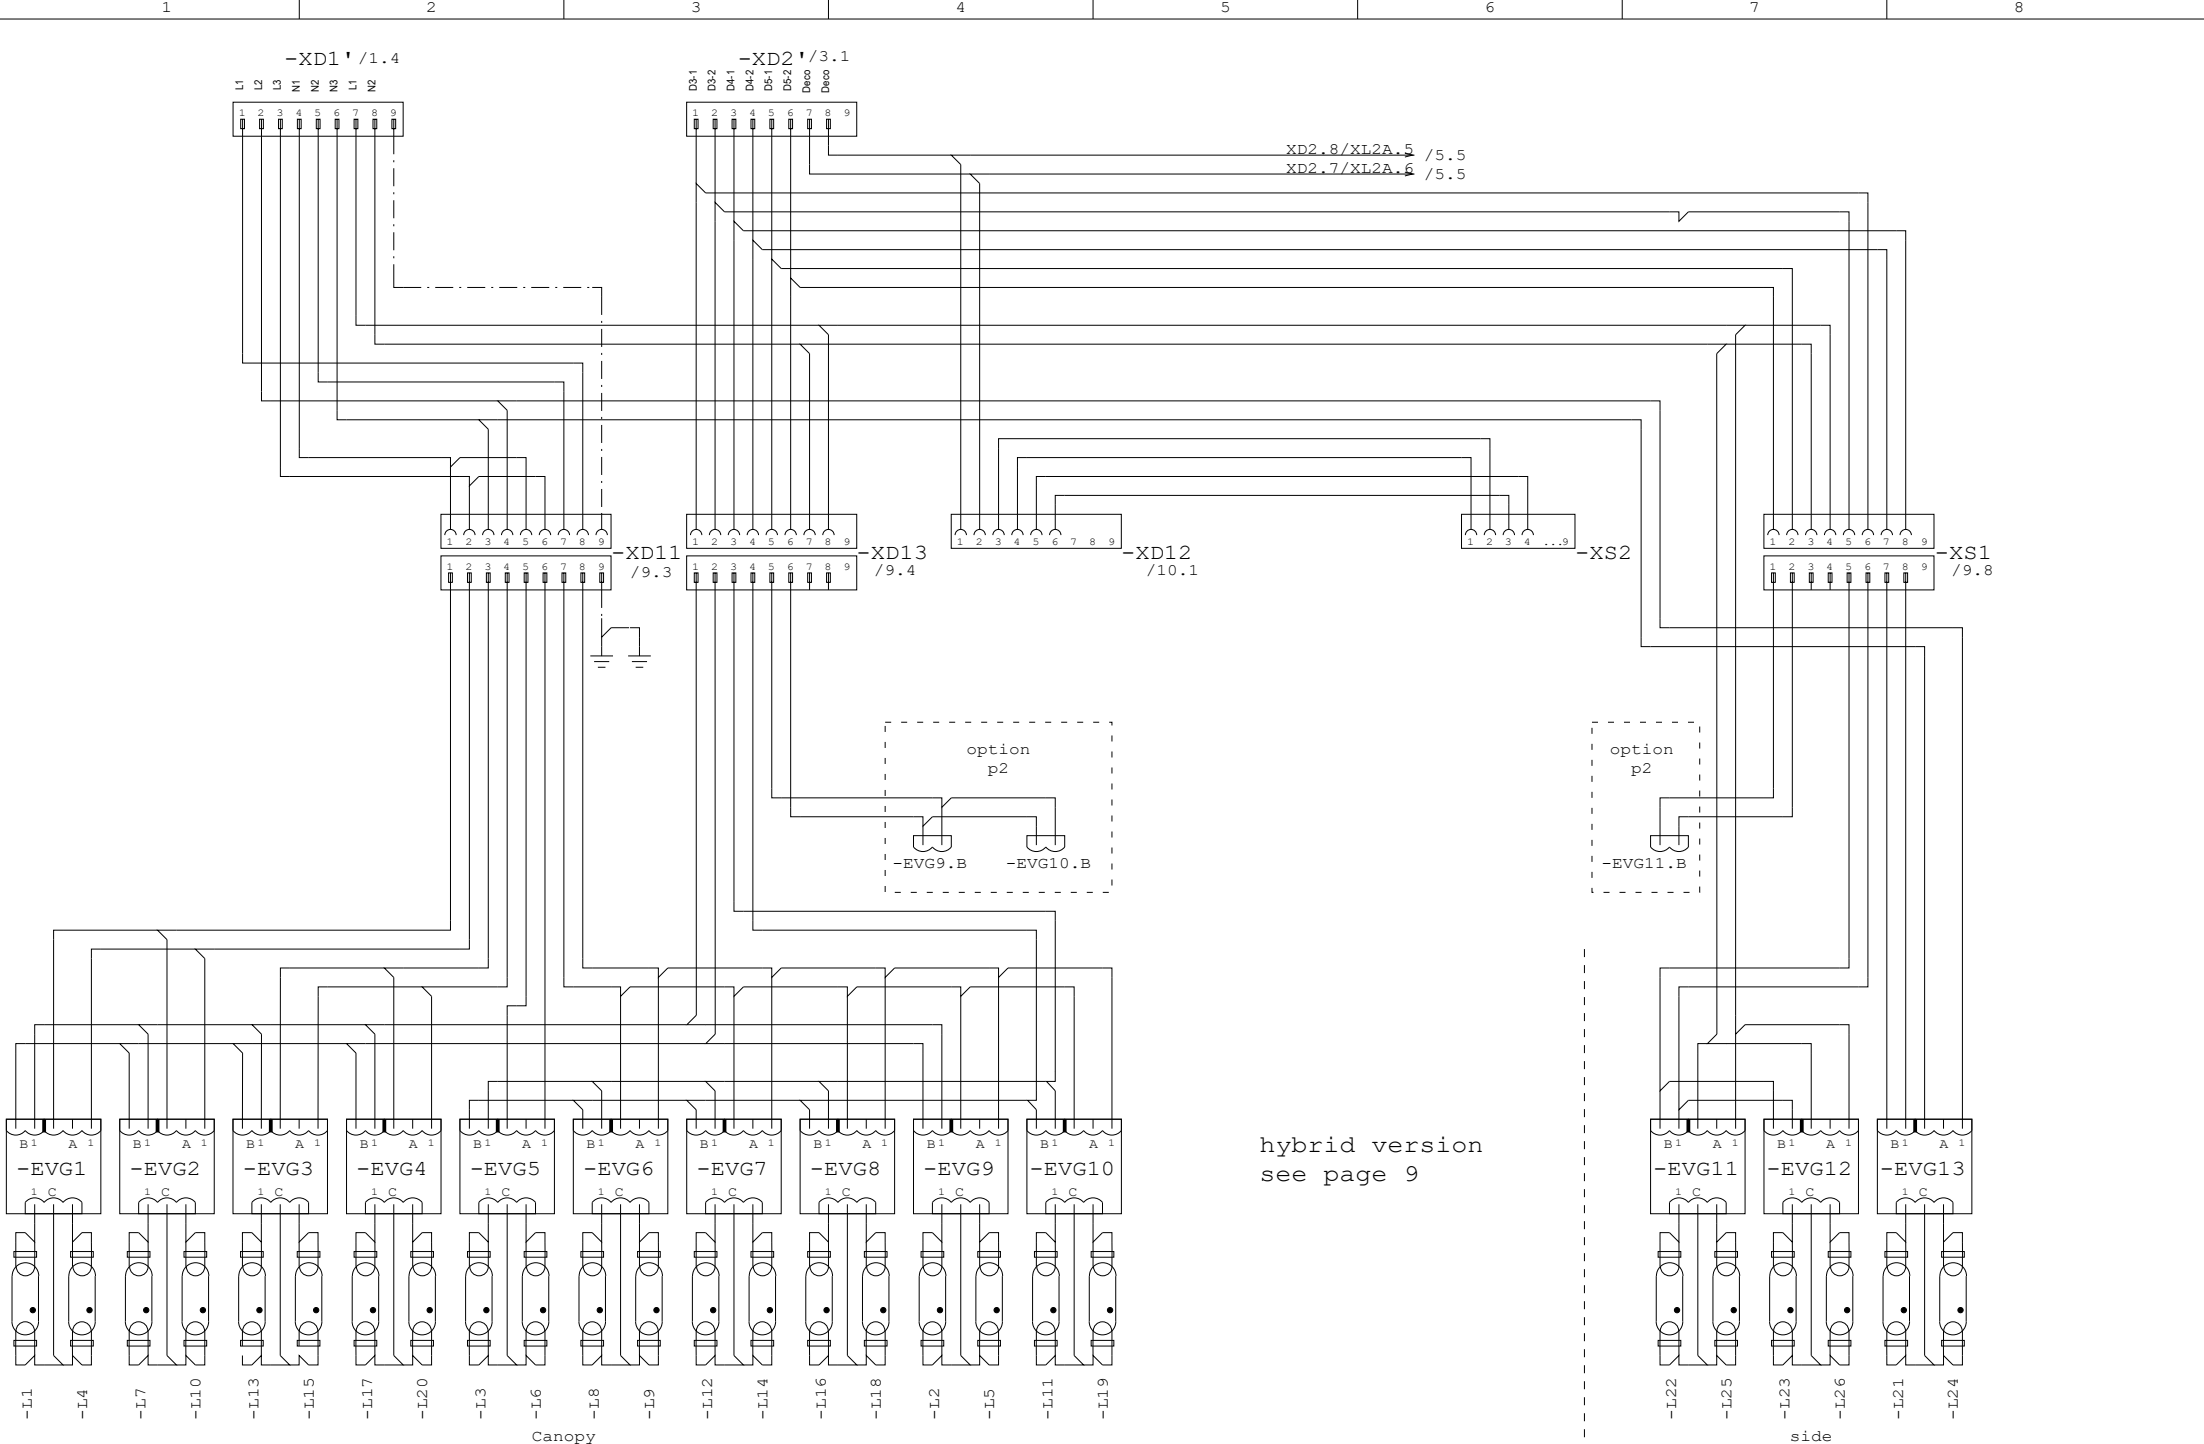

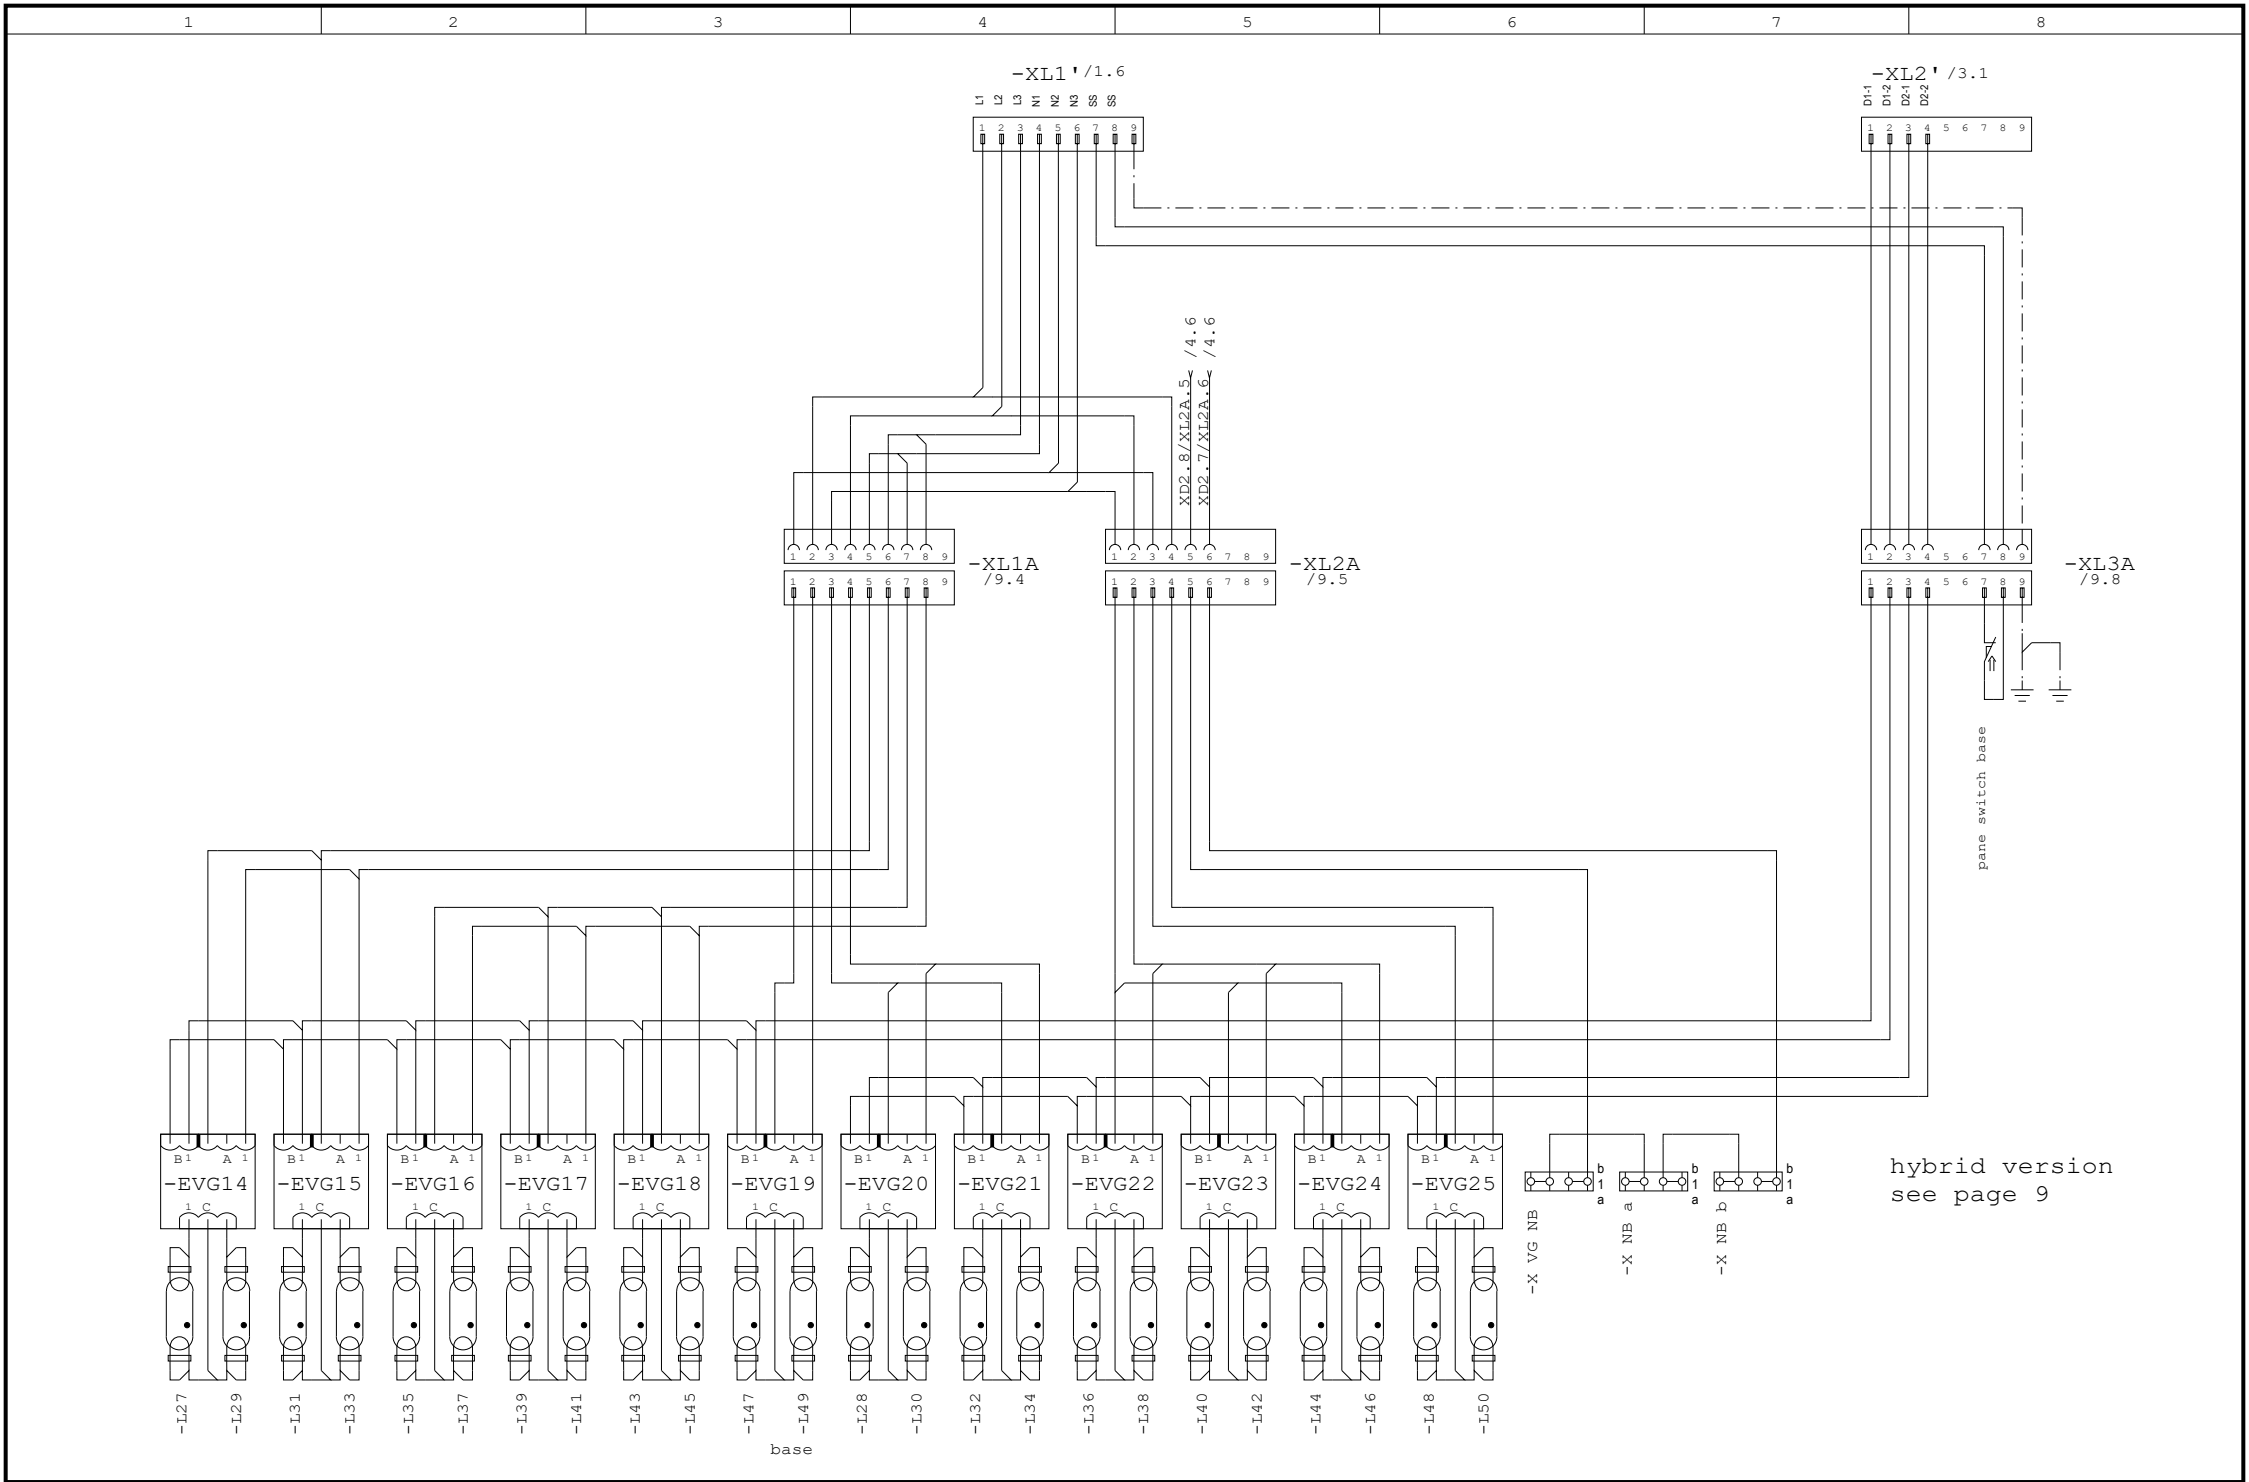


date	19.09.19
name	R.Schmidt
vers.	MS P9 US 01-0919

MS P9 US



tubes bench

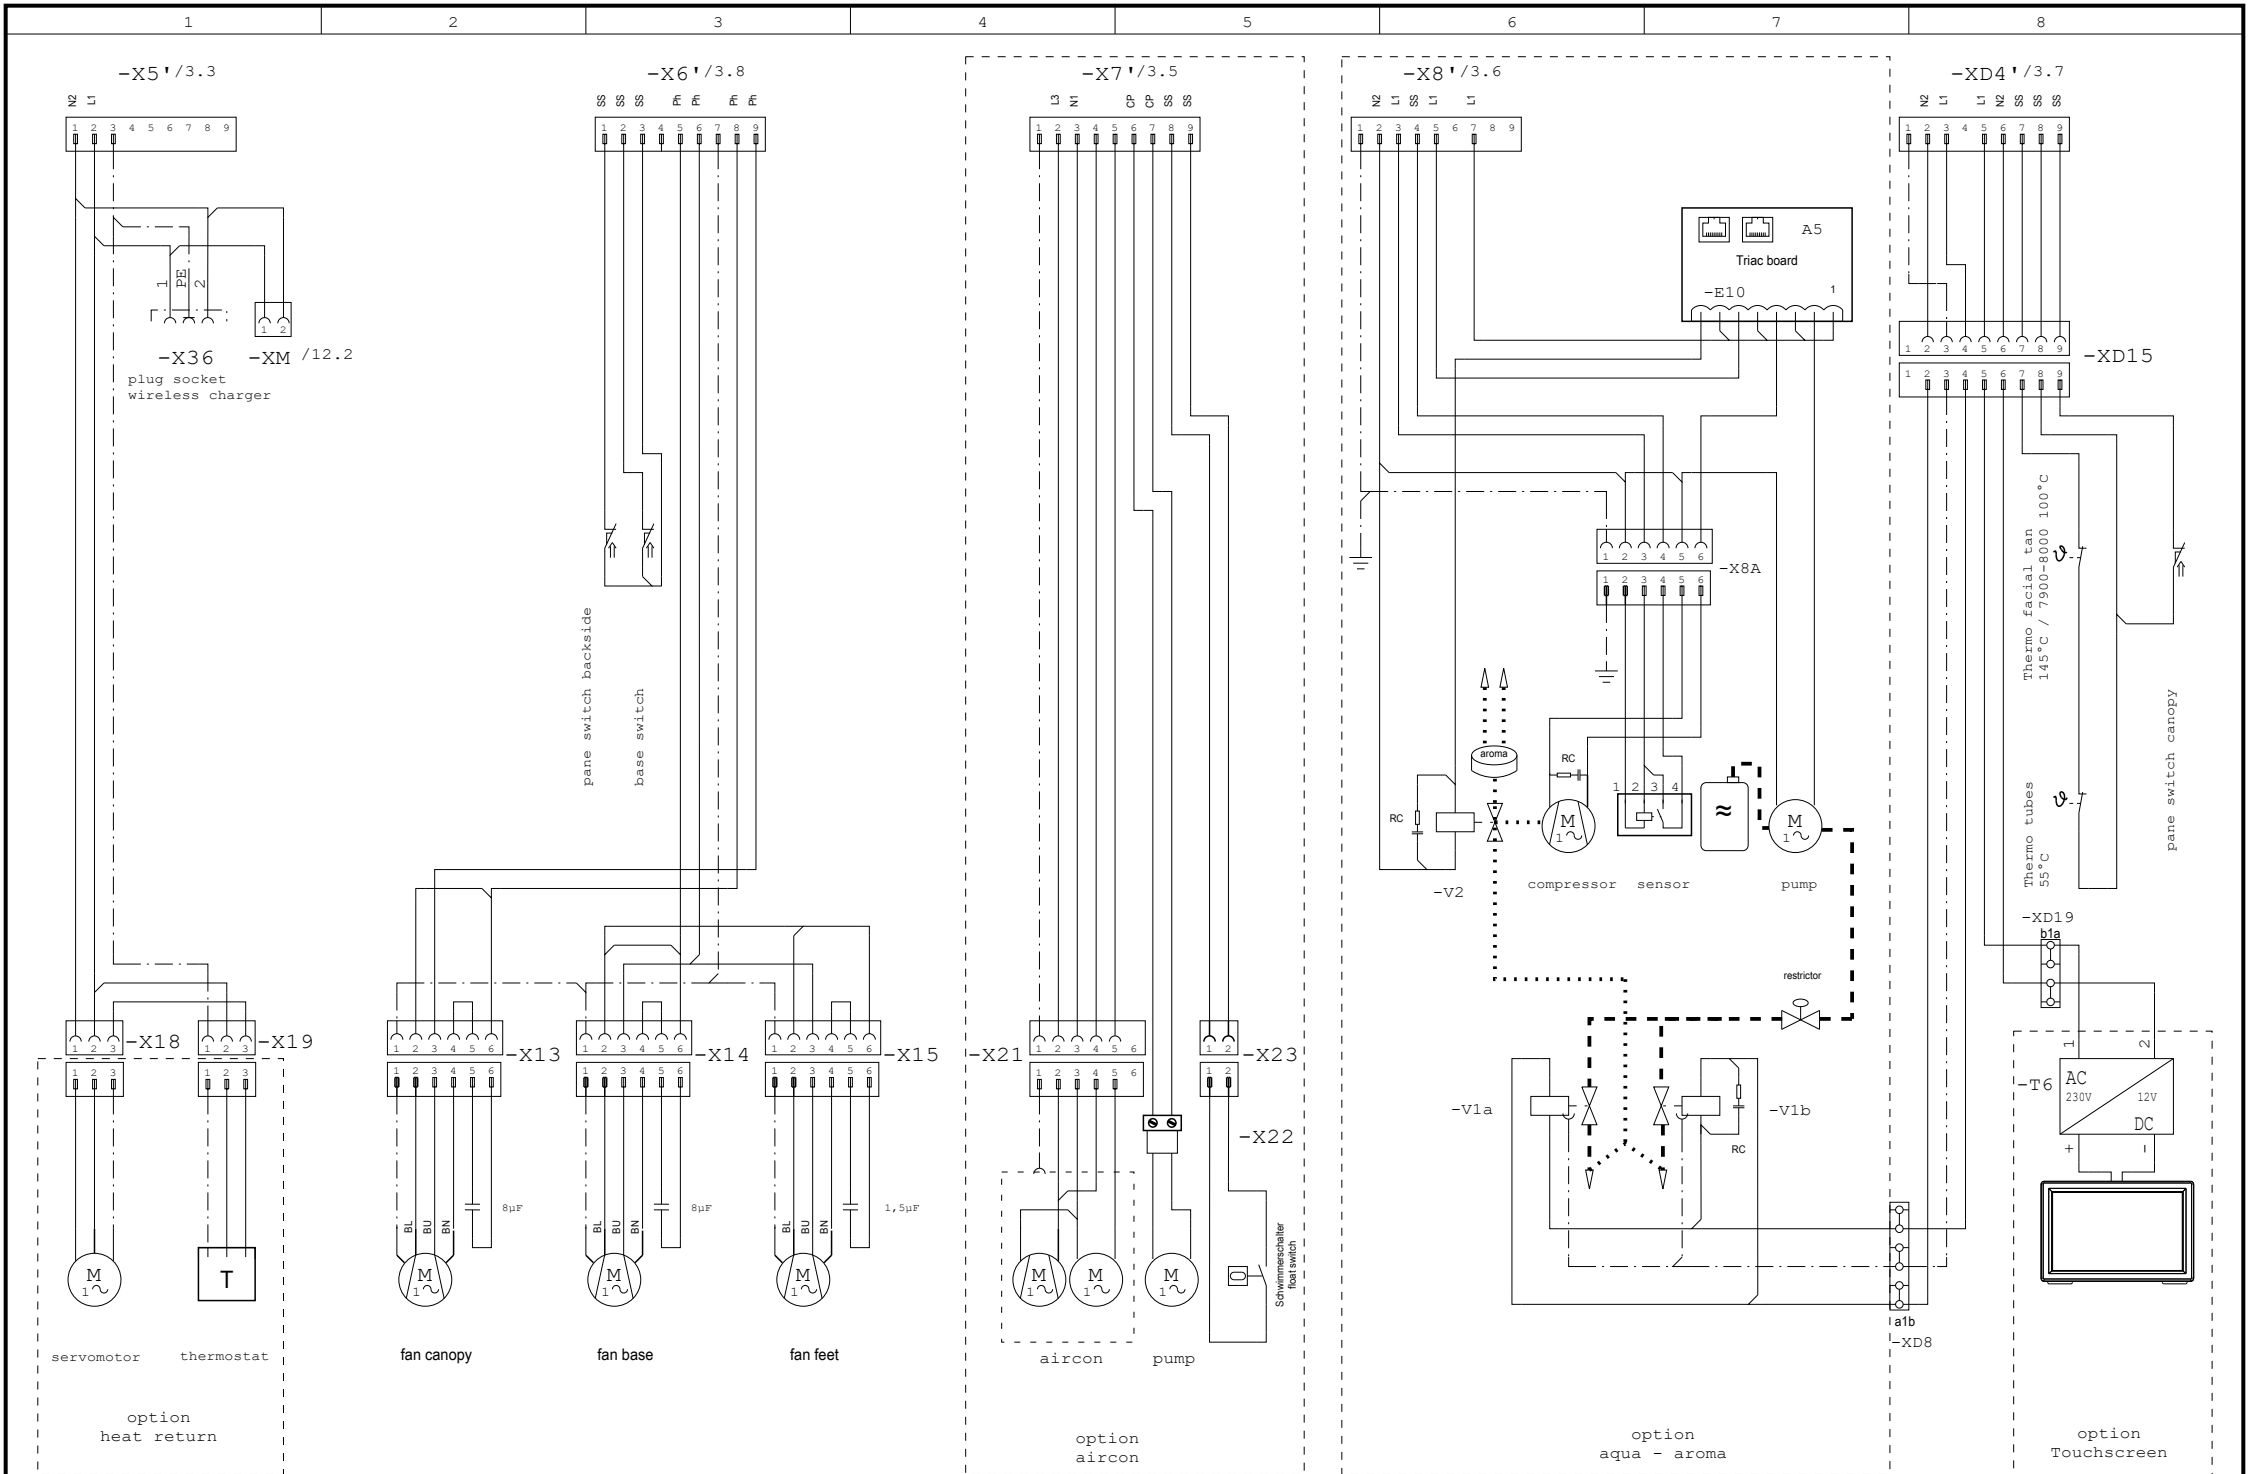


date	19.09.19
name	R.Schmidt
vers.	MS P9 US 01-0919


MS P9 US



heat return - fan aircoon - aqua - aroma

subject to alternations
Blatt 7 von 13 Bl.

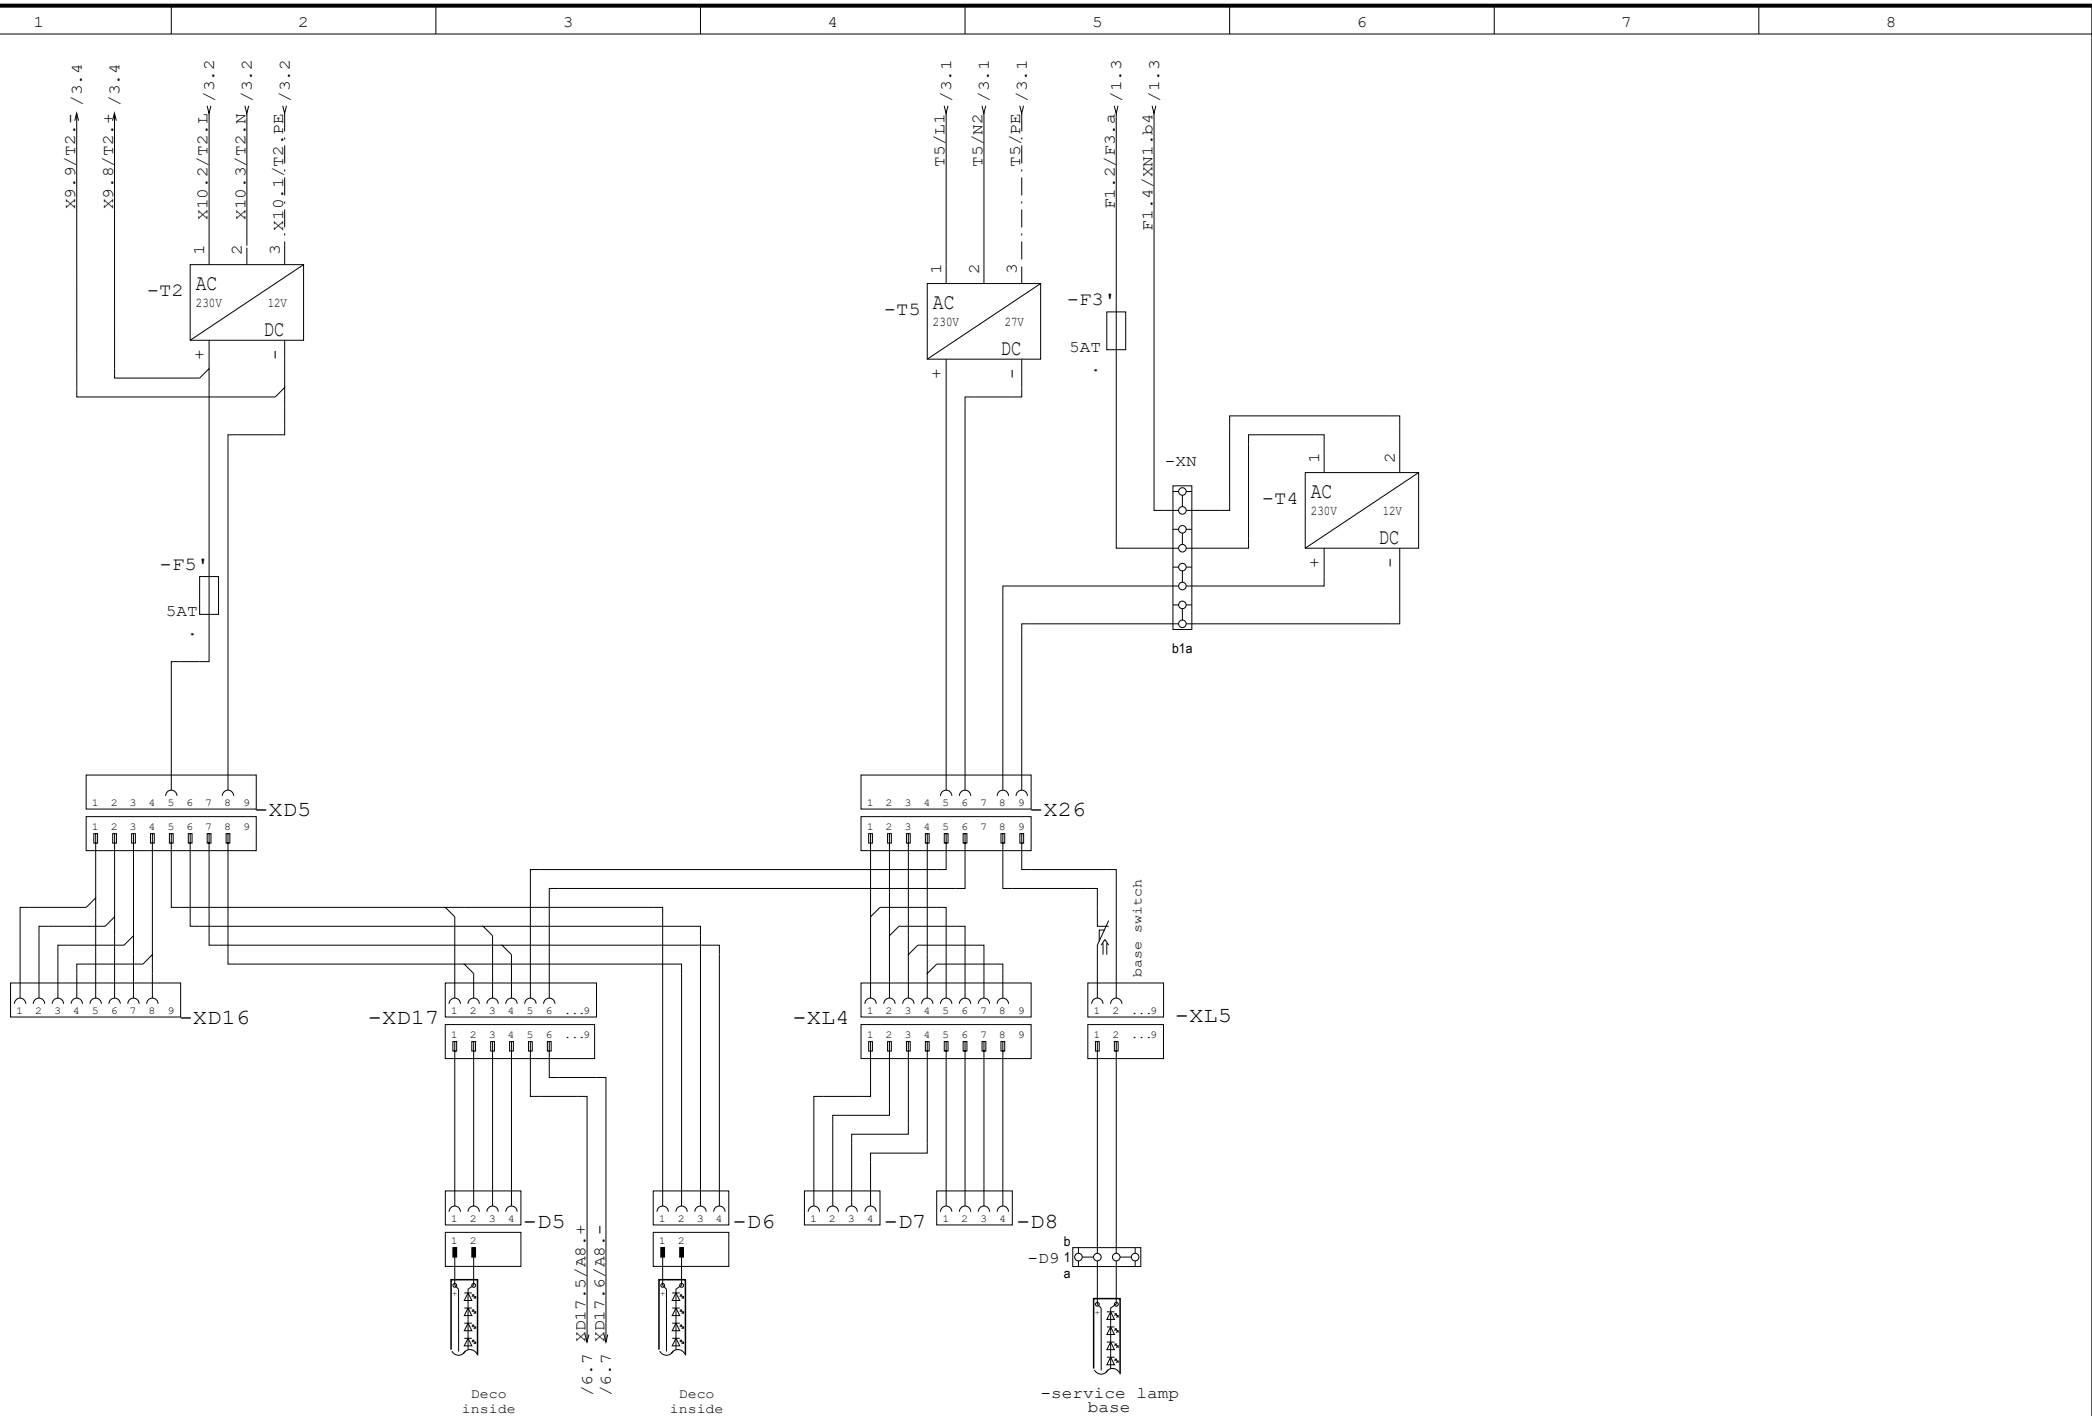

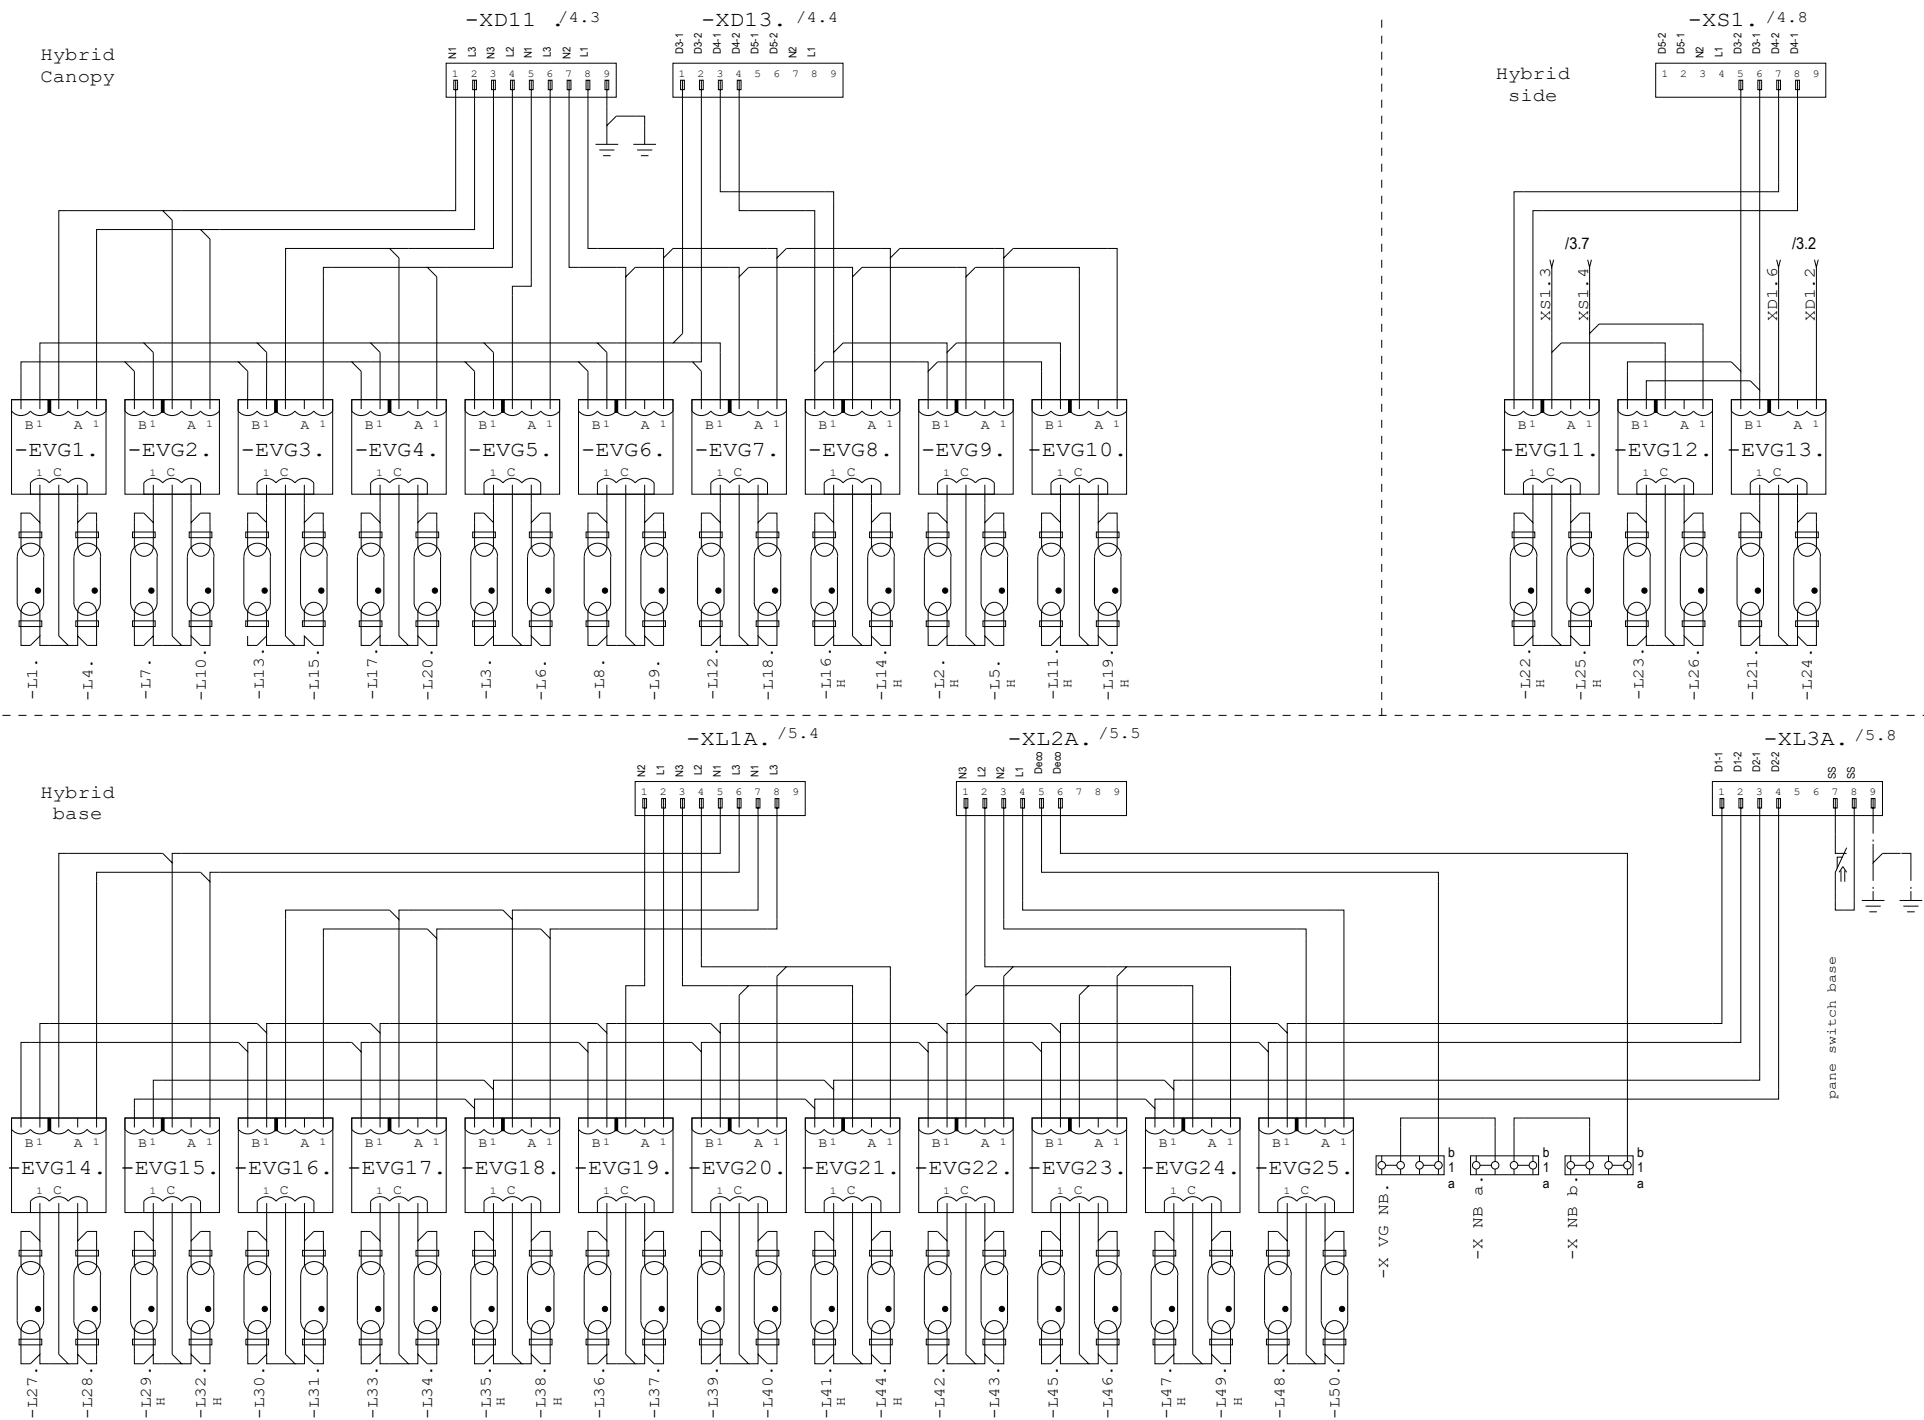


date	19.09.19
name	R.Schmidt
vers.	MS P9 US 01-0919


MS P9 US



wiring - Hybrid

subject to alternations
Blatt 9 von 13 Bl.

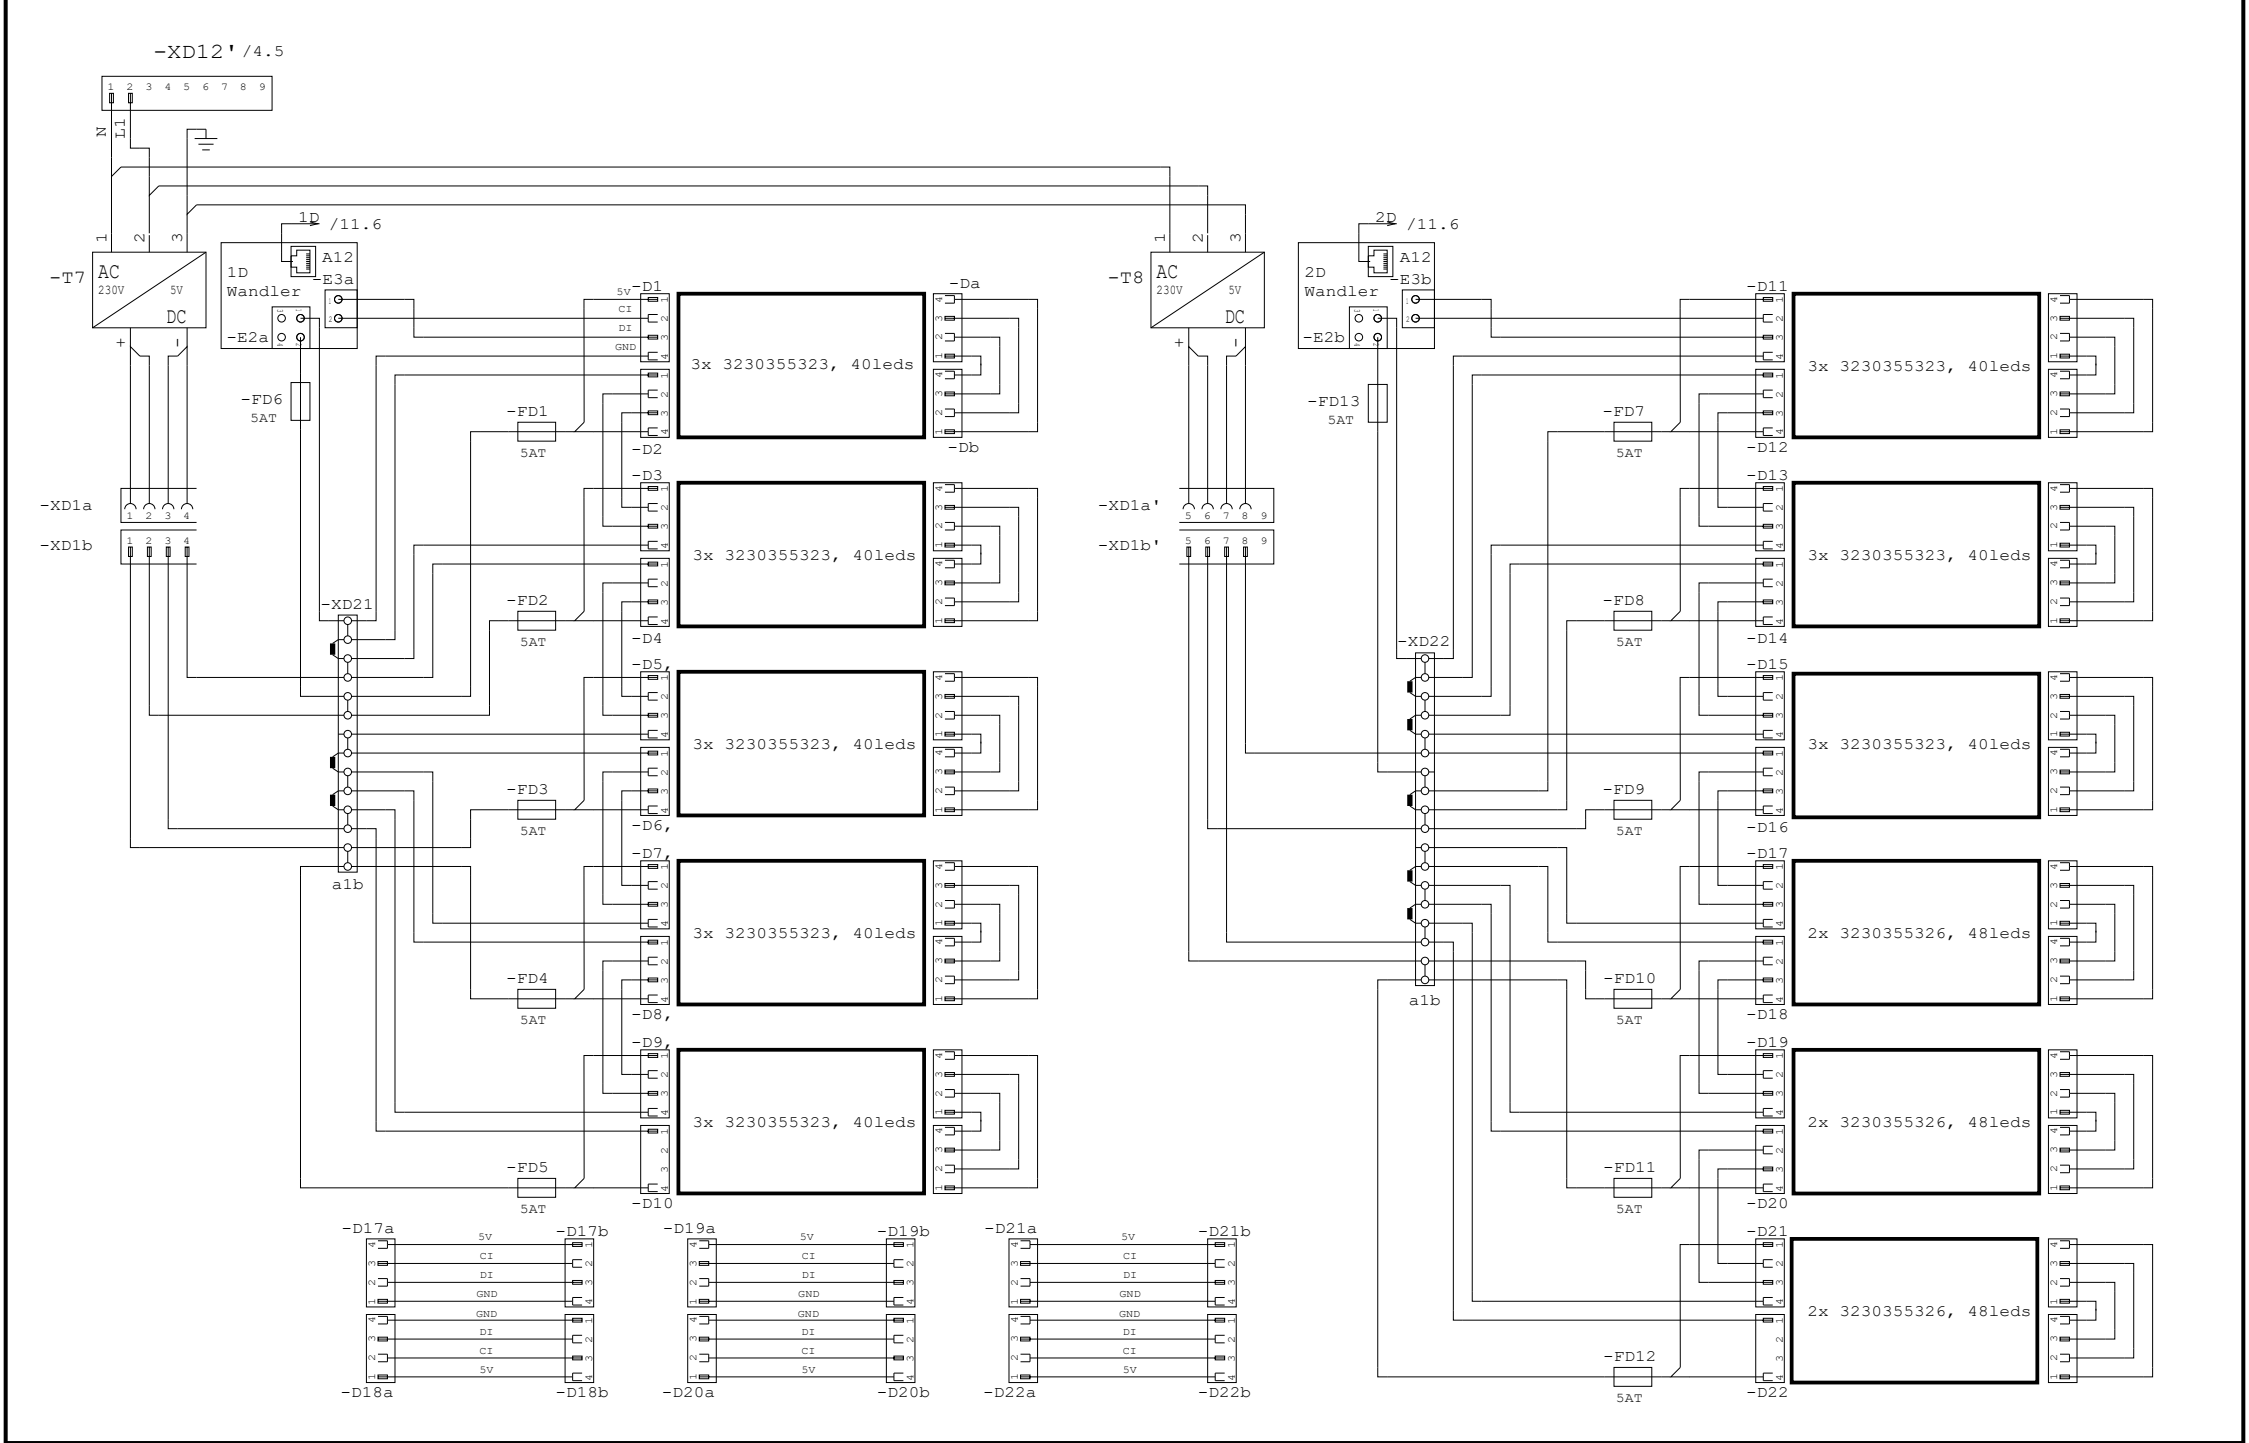

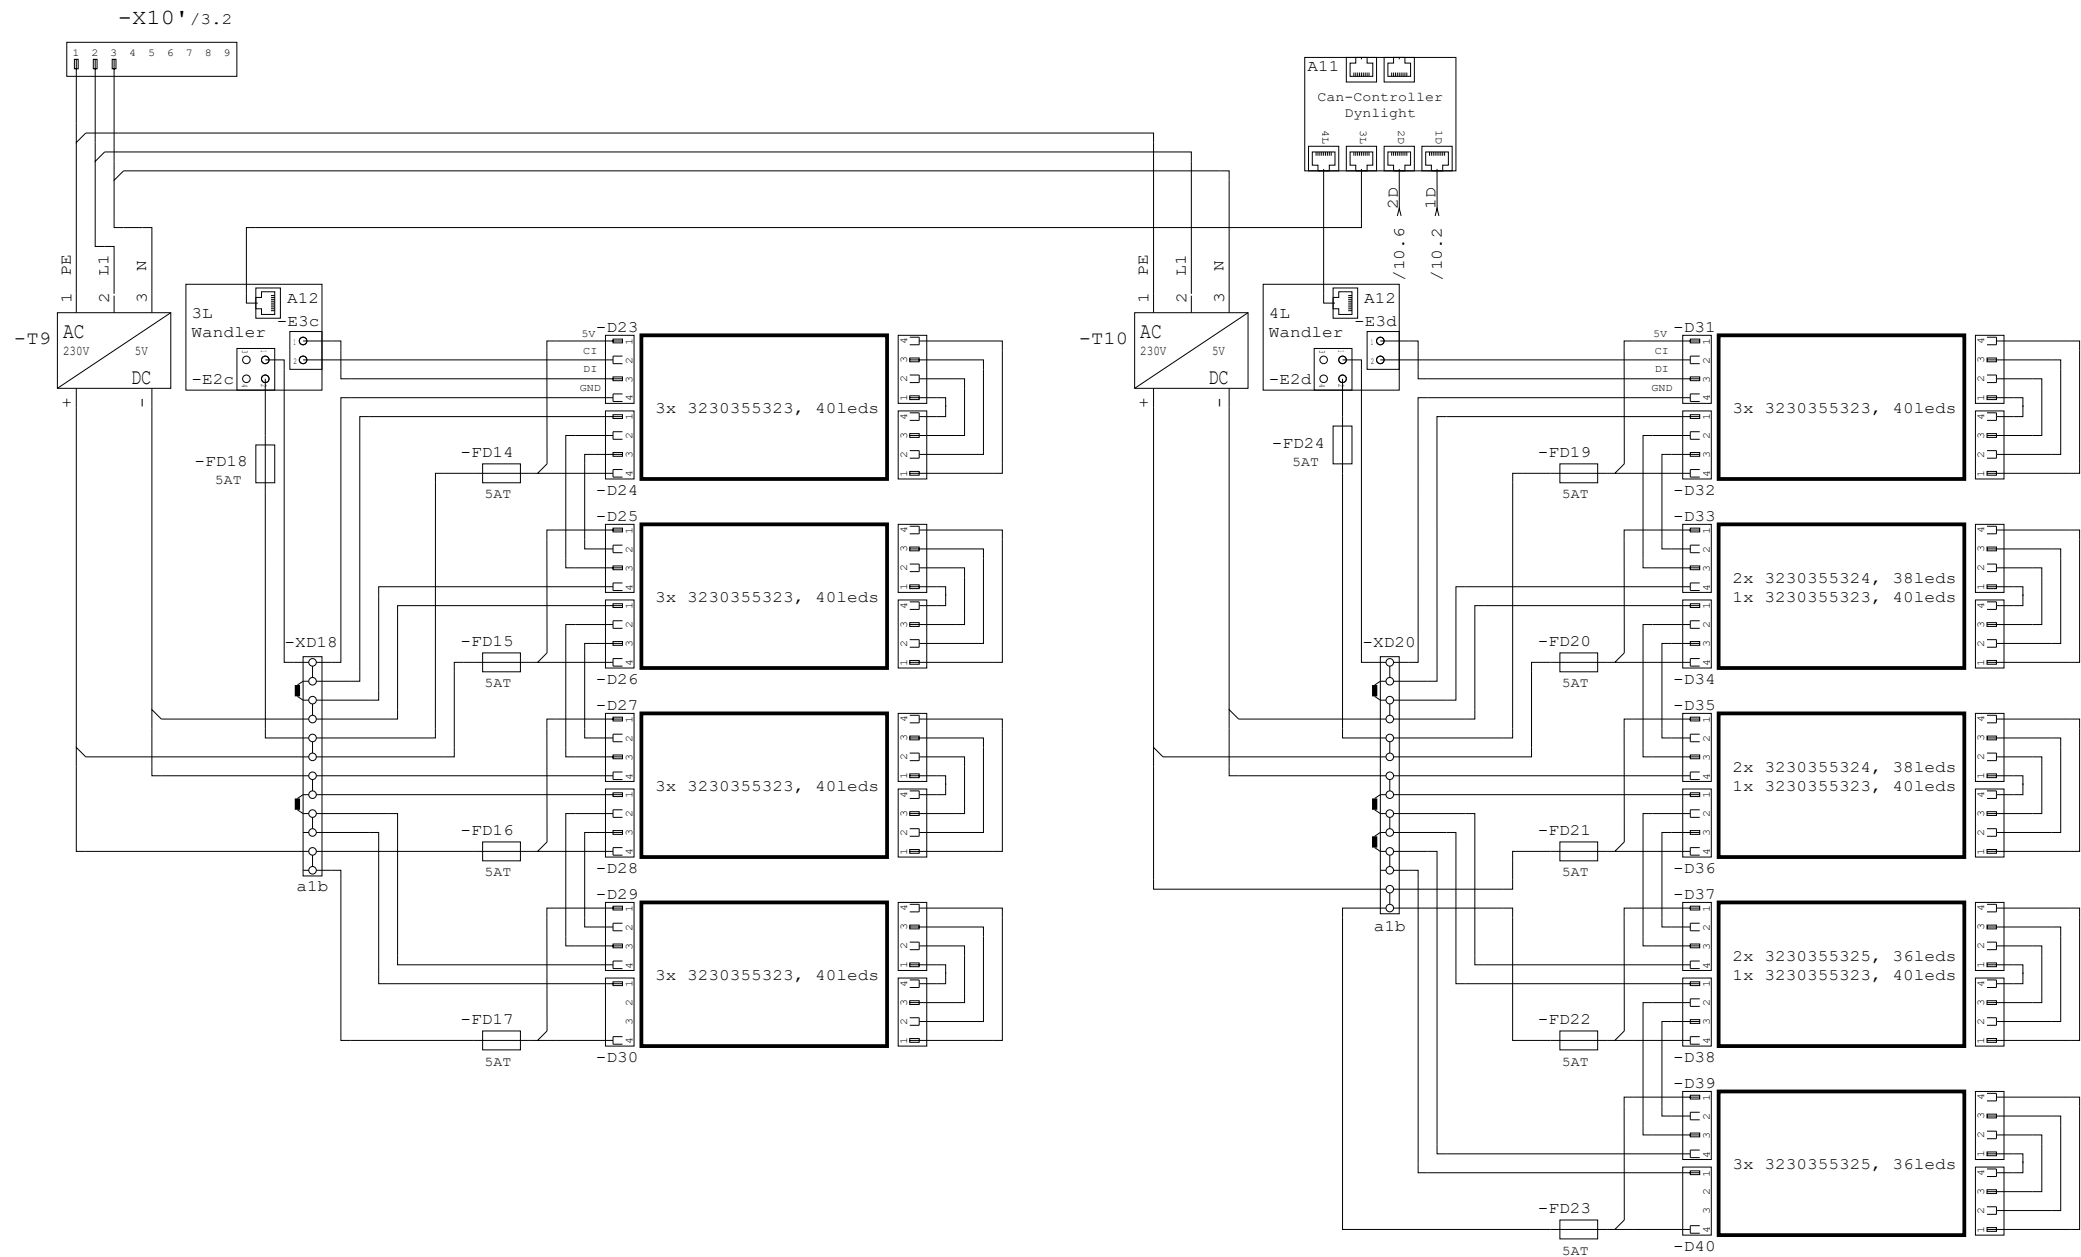


date	19.09.19
name	R.Schmidt
vers.	MS P9 US 01-0919

MS P9 US




LED Matrix front

subject to alternations
Blatt 11 von 13 Bl.

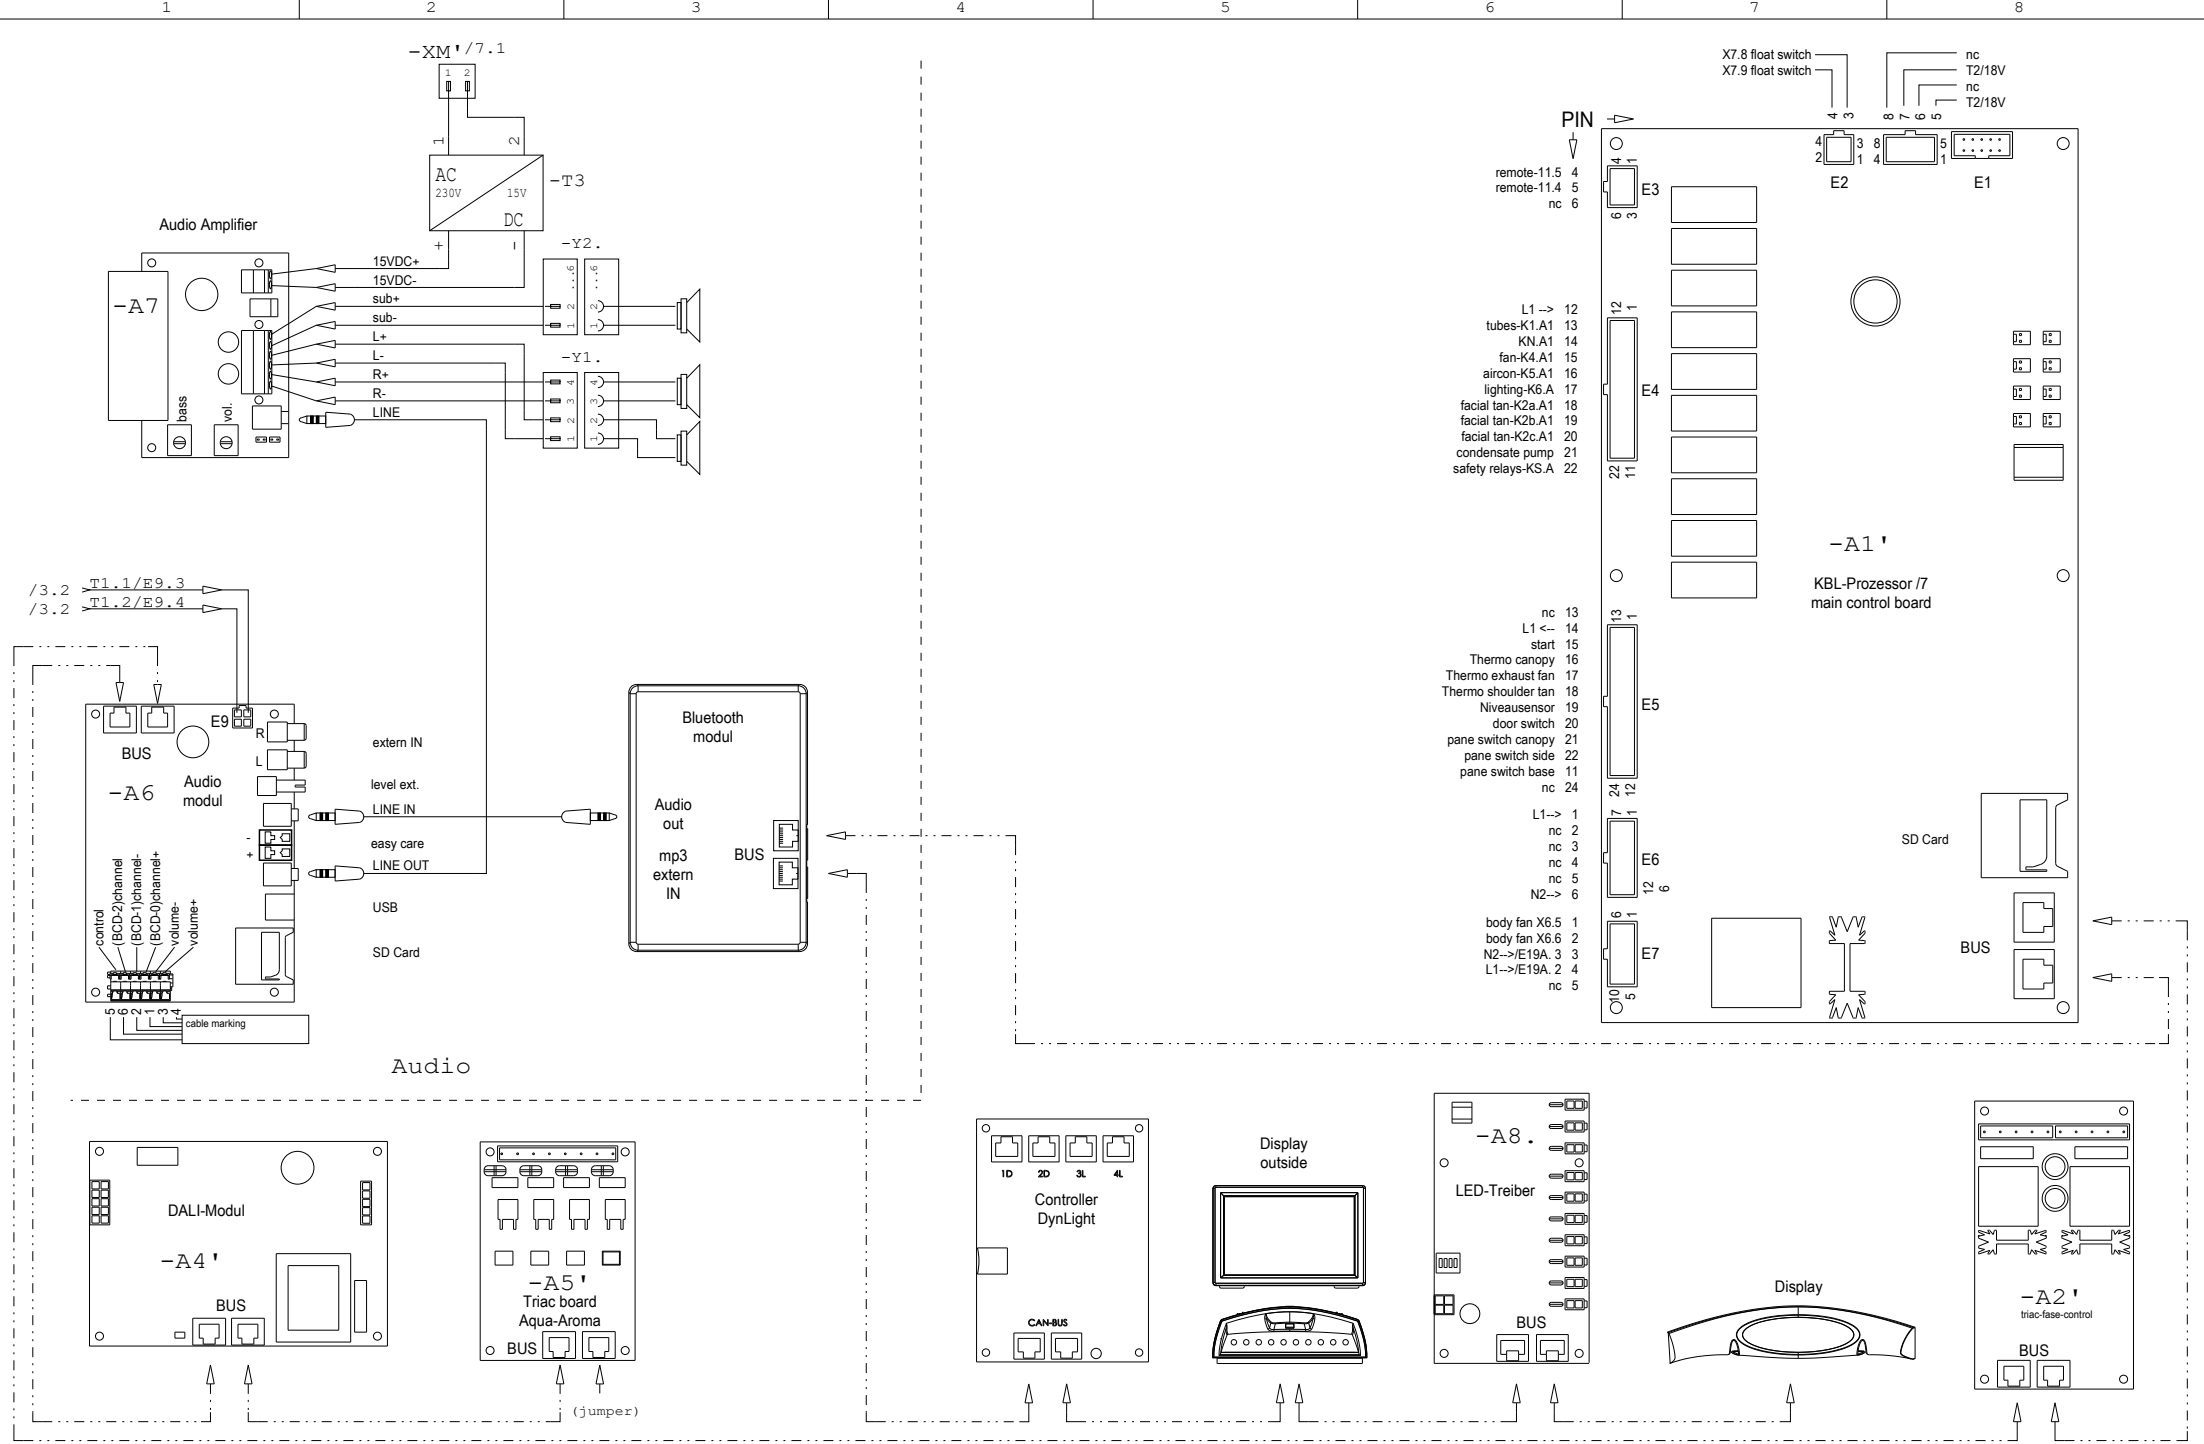

overview tubes

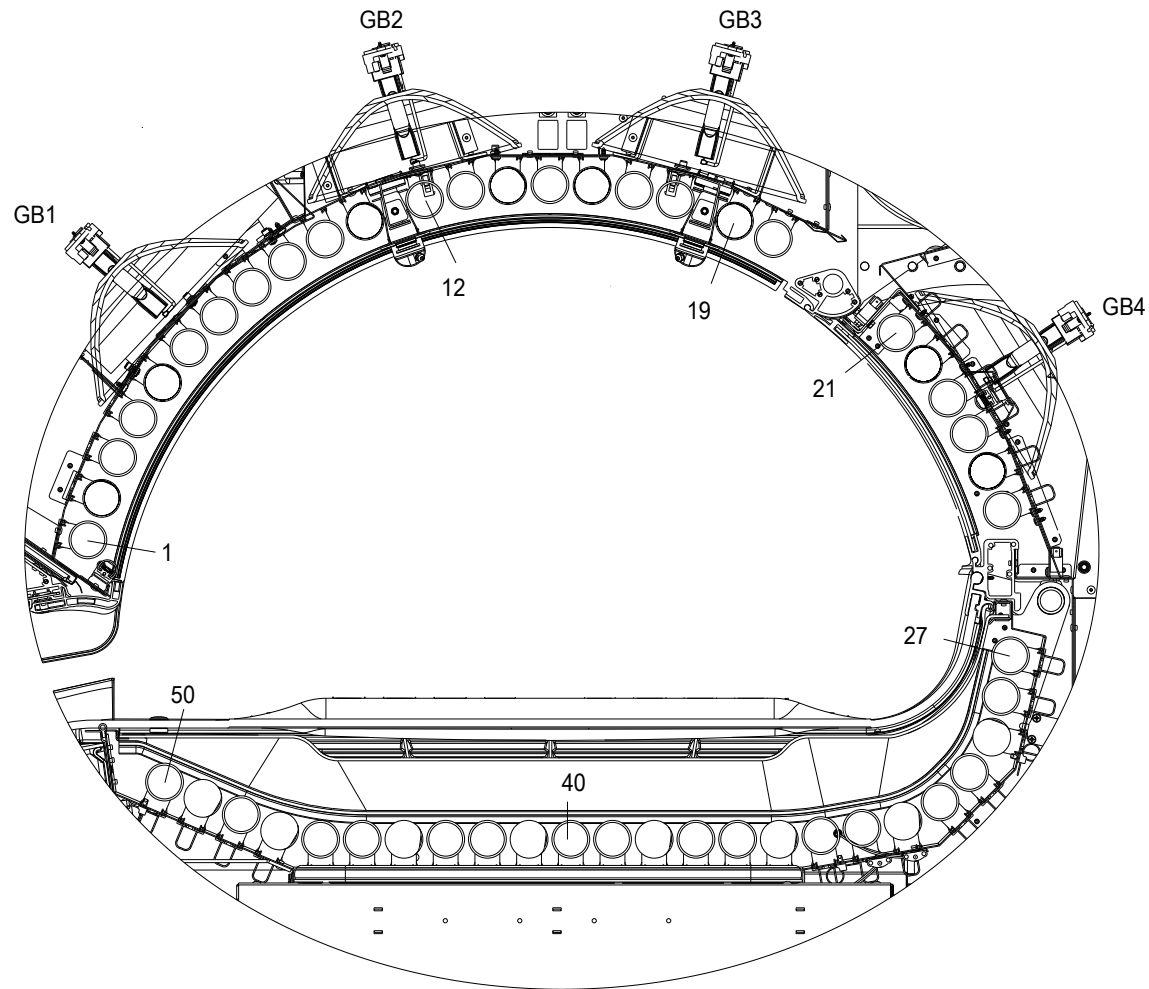

overview ballast

